





# 250L LIFT PUMP

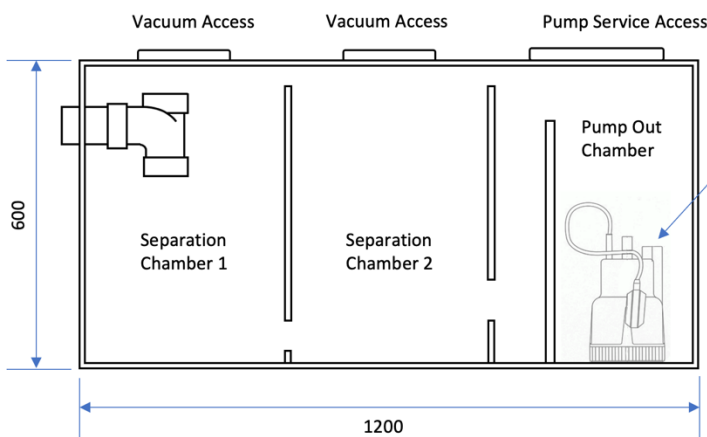

## MACTRAP 250L SEPARATOR WITH WASTEWATER LIFT PUMP ABOVE GROUND INSTALLATION.

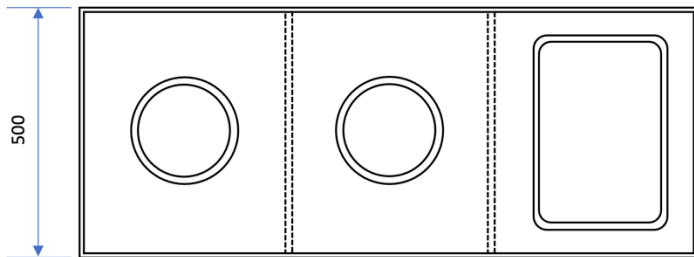

### Pumping capacity

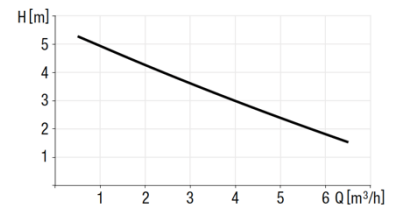

Dimensions: 1200L x 600H x 500W

- The diagrams show the 250L pipework for illustrative purposes.
- Sink/pick up point should be above inlet height.
- External inlet and outlet pipe dimensions can be 100mm or reduced to suit. The 250L is supplied with a Wallace seal to suit 100mm input.
- Flexible couplings should be used for earth movement requirements.
- Less than 65°C continuous operating temperature.
- The top of the 250L is not load bearing.
- Combi ovens require a separate bulkhead fitting suitable for the Combi oven outlet.
- Combi oven inlet should be supplied with an in-line tundish.
- The 250L must be vented to ensure air flow in the top of the tank either with a suitable bulkhead tank fitting or off the inlet or outlet line.
- The inlet or outlet line venting should be within 1M of the 250L.

